



### Linear Fluorescent Luminaires | Ceiling and Wall Washers



SiLING  
 page 6 | 4



Comfolight®  
 page 6 | 5



Siteco Louvre  
 Luminaire M  
 page 6 | 6



Ceilingwasher  
 page 6 | 7

for floodlighting and accent lighting we also recommend:

#### Compact Floodlights



SiCOMPACT A2 MINI  
 chapter 13



SiCOMPACT A2 MIDI  
 chapter 13

#### Compact Spotlights



R1 MINI-S  
 chapter 13



R1 MINI Aluminium  
 chapter 13

#### Trunking Systems wallwashers



DUS® Plus  
 chapter 7

#### spotlight elements



DUS® Plus  
 chapter 7

#### Downlights wallwashers



Lunis®M  
 chapter 5



Lunis®E  
 chapter 5



## SiLING Ceiling and Wall Washer | With Asymmetrical Reflector

**features** SiLING luminaire for wall, ceiling or recessed mounting | with asymmetrical involute satin finish reflector | with HFG or HF dimming as standard\* | sectional aluminium housing, pure white (similar to RAL 9010)

protection rating: IP20  
protection class: I

- benefits**
- slim section body, reflector with 'floating' appearance
  - absolutely glare-free light for a soft spacial illumination
  - asymmetrical reflector results in a particularly even illumination of walls and ceilings



1. SiLING as wallwasher  
2. rear side of housing

Order No.	Lamps (W)	L x B <sup>1)</sup> x H (mm)
<i>SiLING individual luminaire</i>		
5LM 701 7-1CX1	1xT26 36W	1236 80+8 170
5LM 701 7-1EX1	1xT26 58W	1536 80+8 170
5LM 701 7-1CX2	2x1xT26 36W	2469 80+8 170
5LM 701 7-1EX2	2x1xT26 58W	3069 80+8 170
<i>single-cord suspension</i>		
5LM 820 0-1	without terminal	
5LM 820 1-1	with terminal <sup>2)</sup>	
<i>connecting brackets<sup>3)</sup></i>		
5LM 701 0-0	(set of 2)	

1) housing height + shadow gap on mounting surface  
2) including 5-pole terminal, max. 2,5mm<sup>2</sup>  
3) 2 brackets per 1-length luminaire / 4 brackets per 2-length luminaire required

\* the luminaires are available optionally as a dimmable version (see appendix for order number code)



## Comfolight® Continuous Luminaire | Wall Washer

**features** Comfolight® continuous luminaire | with direct asymmetrical distribution satin finish wall washer | with HFG or HF dimming as standard\* | sectional aluminium housing, metallic grey (RAL 9006)

protection rating: IP20  
protection class: I  
(without end caps)

- benefits**
- for the optimal illumination of info panels and goods presentations, or to supplement standard lighting techniques for VDU workstations
  - high level of planning flexibility due to extensive accessories (see chapter 2)
  - also suitable as ceiling washer



1. housing joint as a stylistic element  
2. typical usage for projection screens and other presentational surfaces



Order No.	Lamps (W)	L x B x H <sup>1)</sup> (mm)
5LF 619 7-1P	1xT16 28W	1191 153 51+7
5LF 619 7-1J	1xT16 54W	1191 153 51+7
5LF 619 7-1R	1xT16 35W	1491 153 51+7
5LF 619 7-1F	1xT16 49W	1491 153 51+7
5LF 619 7-1X	1xT16 80W	1491 153 51+7

- 1) housing height + ceiling-sided shadow gap  
 continuous luminaire without end caps, for system or trunking arrangements  
please order connecting elements or end cap sets separately (see chapter 2)

### related products



☑ luminaire systems ch. 2

\* the luminaires are available optionally as a dimmable version (see appendix for order number code)

### reference

☑ Comfolight® system components 2 | 10



## Siteco Luminaire® M Continuous Luminaire | Wall Washer

**features** Siteco Louvre Luminaire M continuous luminaire with wall washer, satin finish | direct asymmetrical distribution | HFG or HF dimmable as standard\* | sheet steel housing, silver (similar to RAL 9006)\*, dust grey\* plastic end caps

protection rating: IP20  
protection class: I  
(including assembled end caps)


- benefits**
- continuous mounting with uninterrupted reflector appearance
  - for the optimal illumination of info panels and goods presentations, or to supplement standard lighting techniques for VDU workstations
  - high level of planning flexibility due to extensive accessories
  - also suitable as ceiling washer



Order No.	Lamps (W)	L x B x H1 <sup>1)</sup> (mm)
with satin finish wallwasher		
5LF 519 7-1PS	1xT16 28W	1207 229 51+7
5LF 519 7-1JS	1xT16 54W	1207 229 51+7
5LF 519 7-1RS	1xT16 35W	1507 229 51+7
5LF 519 7-1FS	1xT16 49W	1507 229 51+7
5LF 519 7-1XS	1xT16 80W	1507 229 51+7

1) housing height + ceiling-sided shadow gap  
□ luminaire for continuous mounting with assembled end caps. For continuous mounting please remove end caps.

1. reflector  
2. end cap detail

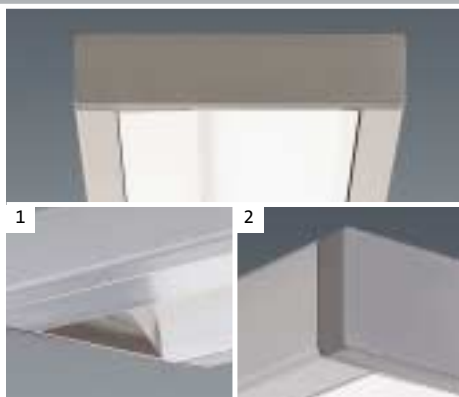

### related products



\* The luminaires are optionally available in a dimmable version and in pure white (similar to RAL 9010) as standard (see appendix for order number code)



## Ceilingwasher | Ceiling and Wall Washer With Asymmetrical Reflector


### features

Ceilingwasher luminaire for individual surface or recessed mounting, with asymmetrical involute reflector, satin finish | direct asymmetrical distribution | HFG or HF dimmable as standard\* | sheet steel housing, silver (similar to RAL 9006)\*

protection rating: IP20  
protection class: I

### benefits

- absolutely glare-free light for a soft spacial illumination
- asymmetrical reflector for extensive and even ceiling illumination penetrating deeply into room-space

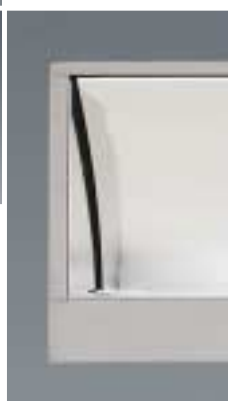

1. ceiling washer for recessed mounting  
2. ceiling washer for surface mounting

Order No.	Lamps (W)	L x B <sup>1)</sup> x H (mm)
<i>for surface mounting</i>		
5LM 701 7-1P	1xT16 28W	1195 57+7 140
5LM 701 7-1J	1xT16 54W	1195 57+7 140
5LM 701 7-1R	1xT16 35W	1495 57+7 140
5LM 701 7-1F	1xT16 49W	1495 57+7 140
<i>for recessed mounting</i>		
5LM 702 7-1P	1xT16 28W	1221 57 166
5LM 702 7-1R	1xT16 35W	1521 57 166
5LM 702 7-1F	1xT16 49W	1521 57 166

1) housing height + ceiling-sided shadow gap